


CAT 5E FTP KEYSTONE JACKS JKA09-SC5E

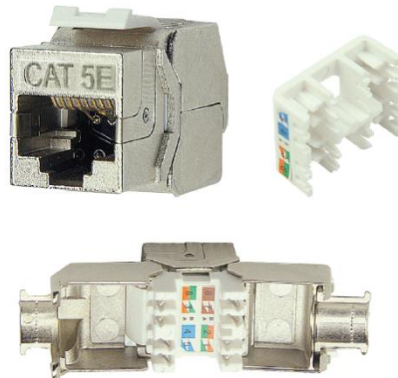

[PRODUCT DESCRIPTION]

The new style Jack provides Category 5E system performance and user-friendly installation features. A shielded is available to maximum protection from EMI/RFI interference, the compact size provides high-density connectivity in the work area and telecommunications room.

[TECHNICAL SPECIFICATION]

- Available in Cat5E, T568A/B wiring, meet or exceed TIA/EIA Cat5erequirements
- Shielding protects against EMI/RFI interference
- Housing : high temperature thermoplastic
- Compact jack design,8 positions and 8 conductors
- Contact : phosphor bronze , phosphor bronze with 6 to 50 μ "gold plate
- Accept 22-26 AWG solid with a insulation diameter of 0.4-0.6 mm
- Easy to be terminated, low attenuation loss and high return loss
- High reliability and superior performance
- Available in different colors

[CONSTRUCTION]

Description	Parameter
Contact resistance(max)	100m Ω
Insulation resistance (min)	500M Ω
Return loss (dB)	5.8dB
Next (dB)	4.7dB
Ps next(dB)	5.5dB

[ORDER INFORMATION]

Part number	Description	standard color	Inner box	Carton	Carton measurement	Carton weight
JKS09-SC5E	Cat5E shielded keystone jacks (180 degree)	Silver	20PCS	200PCS	L 53.5cm × W 31.3cm × H 23.4cm	9.20KG