


DRB OPEN RACK DRB18-66-A

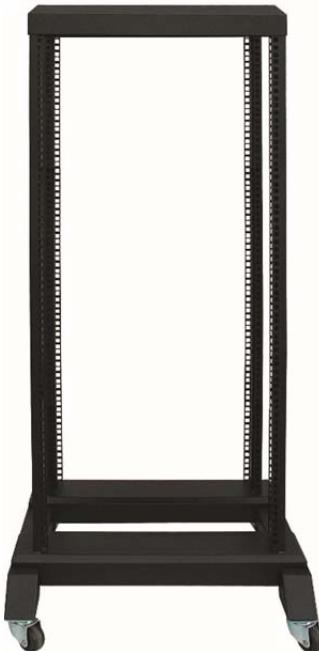

[PRODUCT DESCRIPTION]

- Comply with ANSI/EIARS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92 standard.
- Compatible with metric ETSI and 19 inch international standard.

[APPLICATION]

- Widely used in network system, educational system, broadcasting system and telecommunication system. Suitable for placing server computer and precision electronic equipments.

[MATERIALS]

- Cool rolled steel
Thickness: Front and bottom beams:1.5mm
Else in 1.2mm
Tempered smoky-gray glass with thickness of 5mm.

[TECHNICAL SPECIFICATION]

- Modular design, easily assemble and disassembl for delivery, low cost.
- Various optional accessories according to requirements.
- Static load: 150kg.
- Lever of protection: IP20.
- Surface finish: Degreased, acid cleaned, phosphoric, water cleaned, electro-static powder coating, meet ROHS standard.
- Optional color: black/gray.
- Optional accessories.

[ORDER INFORMATION]

Part No	Capacity/U	Width/mm	Depth/mm	Height/mm	CM/Width/m	CM/Depth/m	CM/Height/m	Volume/CBM
DRB18-66-☆	18U	600	600	1040	0.63	0.31	1.00	0.1953
DRB22-66-☆	22U	600	600	1222	0.63	0.31	1.18	0.2305
DRB27-66-☆	27U	600	600	1444	0.63	0.31	1.40	0.2734
DRB32-66-☆	32U	600	600	1555	0.63	0.31	1.63	0.3183
DRB37-66-☆	37U	600	600	1666	0.63	0.31	1.85	0.3713
DRB42-66-☆	42U	600	600	1888	0.63	0.31	2.07	0.4043
DRB47-66-☆	47U	600	600	2110	0.63	0.31	2.29	0.4472

☆=Colors A=Black(RAL9004) B=Gray(RAL7044)