

CAT 3 UTP SOLID CABLE

P/N: CLA01

S/N: C07-002



DESCRIPTION

- Rated temperature: 70°C
- Reference standard: UL Subject 444, EIA/TIA 568B & ISO/IEC 11801
- Solid bare copper conductor
- Colour-coded PE insulation
- Rip cord (optional)
- PVC or LSZH jacket
- Paclaging: Box

APPLICATION

- Telephony Voice Wiring

PRODUCT FIGURE

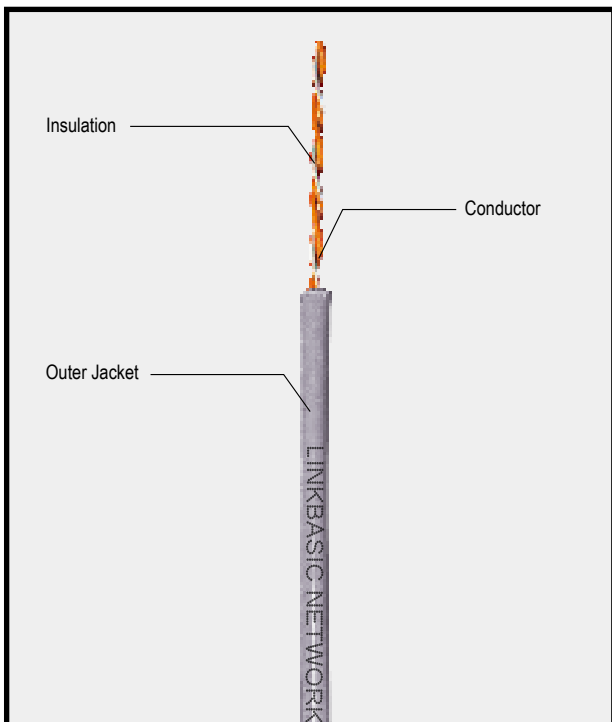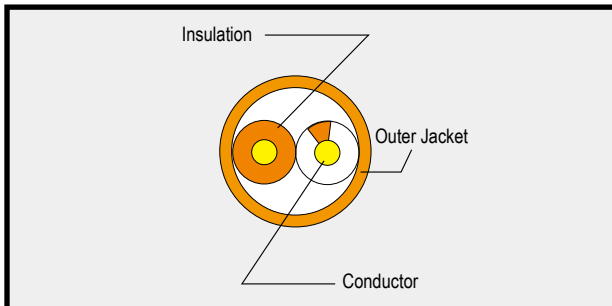

SOLID CABLE, CAT3, UTP, 1pairs, 24AWG, 1000feet



CLA01

1 pair UTP Solid Cable

RAL 7004

CONSTRUCTION

| | | |
|--------------|---------------------------------------|----------------------|
| Structure | Construction | UTP |
| | Number of Pairs | 1 Pair |
| | AWG | 24AWG |
| | Conductor Dimension (mm) | 0.50AWG |
| Insulation | Insulation material | HOPE, FRPE |
| | Insulation Dimension (mm) | 0.83 |
| | Number Colour (Ring or Strip marking) | - |
| | Cross Filler | No |
| Shield | Individual Shield & Material | No |
| | Outer Shield & Material | No |
| | Drain Wire | No |
| Outer lacket | Outer Jacket Material | PVC or LSZH |
| | Outer Jacket Ripcord | Per customer request |
| | Overall Nominal Diameter (mm) | |

MECHANICAL CHARACTERISTICS

| | |
|----------------------------------|--------------|
| Operating Temp. Range | -20~70 °C |
| Bulk Cable Weight (KG) | 5.90KG |
| Max. Recommended Pulling Tension | - |
| Min. Bend Radius (Install) | 90mm |
| Flame Test | CMR, CMX, CM |

ORDER INFORMATION

| Part number | Description | AWG | Standard color | packing Type | Carton | Carton measurement | Carton weight |
|-------------|------------------------|-------|----------------|--------------|--------|---------------------------|---------------|
| CLA01 | 1 pair UTP Solid Cable | 24AWG | RAL7004 | Box | 500m | L30.5cm × W20cm × H31.5cm | 5.90KG |