

**KEYSTONE JACK, CAT5E, UTP, T568A/B, 8 Positions 8 conductors, accept 22-26AWG conductors, different colors,180degree.**

**DESCRIPTION**

Horizontal style Cat5E 180 degree keystone jacks, it features dual color-coded wiring label with both T568A/B wiring pattern. Rear termination field for easy termination of a jack while installed in a wall plate, surface mount boxes, and blank patch panels for a wide variety of Applications.


**APPLICATION**

- Available in Cat 5E, T568A/B wiring schemes, meet or exceed TIA/EIA Cat5E requirements
- Housing : high temperature thermoplastic
- Compact jack design,8 positions and 8 conductors
- Contact : phosphor bronze , phosphor bronze with 6 to 50μ" gold plate
- Accept 22-26 AWG solid with a insulation diameter of 0.4-0.6 mm
- Easy to be terminated, extremely low attenuation loss and high return loss
- High reliability and superior performance
- Available in different colors

**CONSTRUCTION**

Description	Parameter
Contact resistance(max)	100mΩ
Insulation resistance ( min )	500MΩ
Return loss ( dB )	5.8dB
Next ( dB )	4.7dB
Ps next(dB)	5.5dB

**PRODUCT FIGURE**

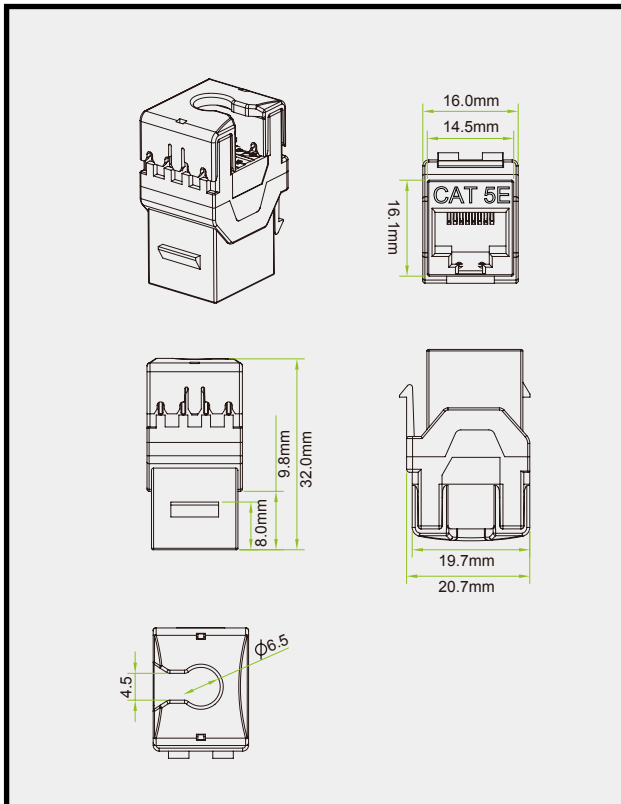

**ORDER INFORMATION**

Part number	Description	Standard Color	Inner box	Carton	Carton measurement	Carton weight
JKA09-UC5E	Cat5e unshielded keystone jacks (180 degree)	White	25PCS	250PCS	L 53.5cm×W 31.3cm×H 23.4cm	3.80KG

**CAT 5E UTP KEYSTONE JACKS**  
Copper solution