

NCE NETWORK SERVER CABINET

S/N:NO4

Part Number: NCE



STANDARD

Comply with ANSI/EIARS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7 and GB/T3047.2-92 standard. Compatible with 19 inch international, Metric and ETSI standard.

FEATURES

- Exquisite design reflects the ability of managing server.
- Can adapt to more servers with good compatibility. Perfect ventilation.
- Ventilated front door and rear door enable ventilation and reliable operation.
- Top and bottom wiring channel can be closed. The size of wiring hole on the bottom is adjustable. Equipped with ground screw.
- Optional plinth meets the requirement of cabinet fixation, bottom wiring, bottom ventilation and rat proof.
- Detachable doors ensure operation in all direction. Efficient and solid cabinet connection
- Can install castor and support feet at the same time. Max static loading capacity: 1000kg.
- High-class cabinet door lock with revolving handle
- Surface finish: degreasing, pickling, phosphoric, water cleaning, electrostatic powder coating (thickness: 80µm-100µm). Comply with ROHS.
- Colour: black or gray.
- Different height, width, depth and accessories are available.

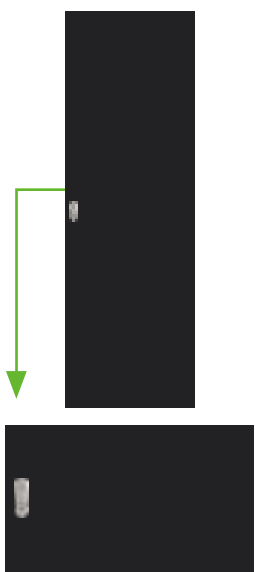
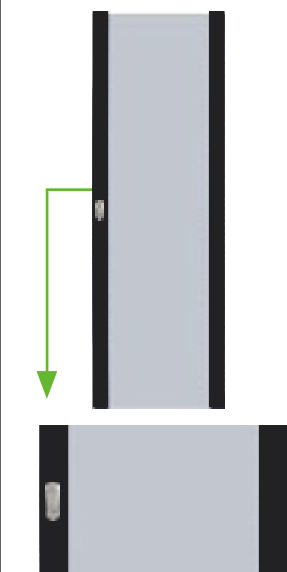
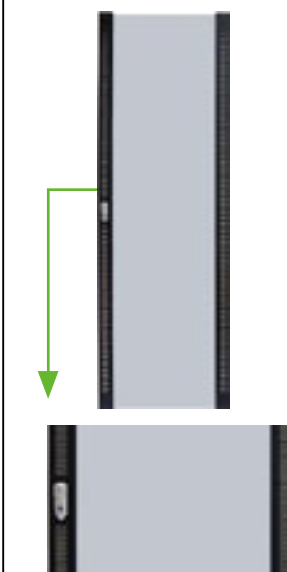
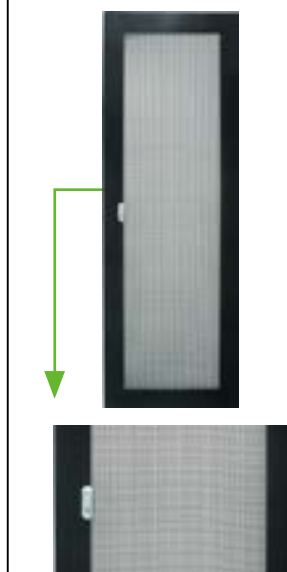
MATERIALS

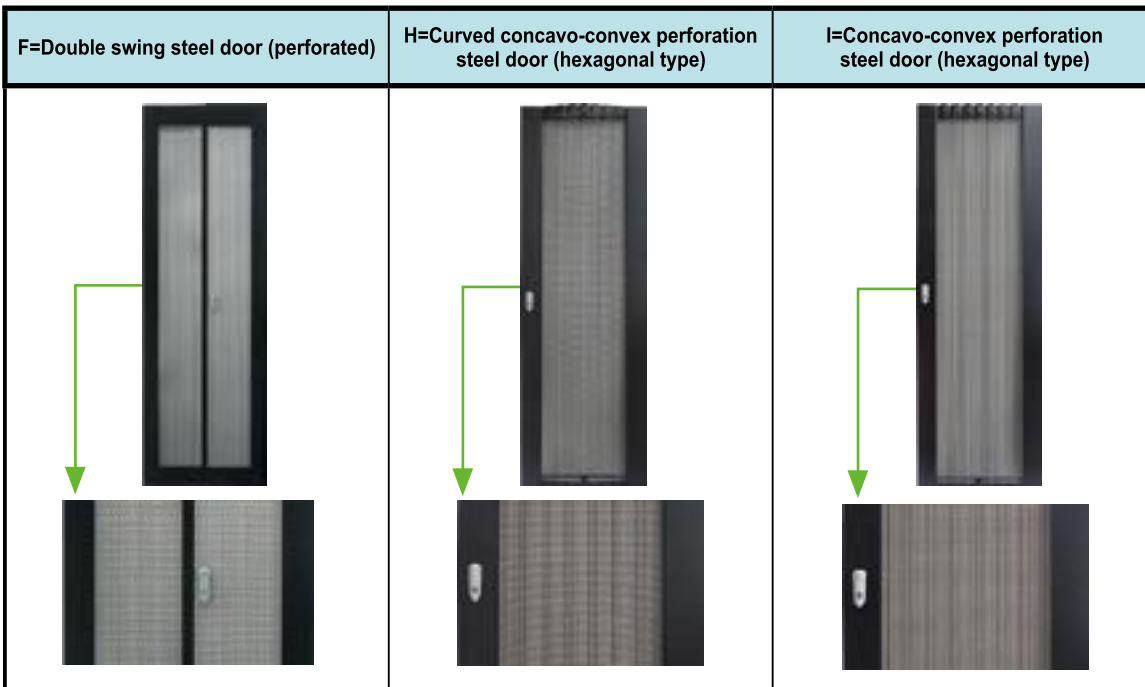
Produced by cold-rolled steel. Frame thickness: 0.8mm, square strip thickness: 1.2mm, and transparent stalinite thickness: 5.00mm.

APPLICATION

Widely used in machine room of Finance, Securities and Data Center, and specially designed for server. Can provide good performance and stable working environment for equipment in cabinet, and adopted by professional server suppliers, such as IBM, SUN, HP, COMPAQ, DELL, etc.

DOORS

A=Steel casement door	B=Smoky-gray glass door	C=Smoky-gray glass door with both sides punched	D=Perforated steel door
			



ORDER INFORMATION

Part No.	Capacity/U	Width/mm	Depth/mm	Height/mm	Carton measurement			Volume/CBM
					Width/M	Depth/M	Height/M	
NCE18-66-*#☆	18U	600	600	988	0.63	0.63	1.02	0.40
NCE22-66-*#☆	22U		600	1166	0.63	0.63	1.20	0.48
NCE27-66-*#☆	27U		600	1388	0.63	0.63	1.42	0.56
NCE32-66-*#☆	32U		600	1610	0.63	0.63	1.64	0.65
NCE37-66-*#☆	37U		600	1833	0.63	0.63	1.86	0.74
NCE42-66-*#☆	42U		600	2055	0.63	0.63	2.08	0.83
NCE42-68-*#☆			800		0.63	0.83		1.08
NCE47-66-*#☆	47U		600	2277	0.63	0.63	2.30	0.91

REMARKS

*=Front door #=Rear door

COLOR

☆ = Colors A= Black (RAL9004) B=Gray(RAL7044)



INTELLIGENT CABLE SYSTEM
 SYSTEM PRODUCTS CAT 7
 SYSTEM PRODUCTS CAT 6A
 SYSTEM PRODUCTS CAT 6
 SYSTEM PRODUCTS CAT 5E
 TELECOMMUNICATION SERIES
 COPPER SOLUTION PRODUCTS ACCESSORIES
 FIBER OPTIC SOLUTION PRODUCTS
 CABINET&ENCLOSURE